

ADM221X RTD Transmitter/Splitter

- Suitable for SIL 1 & SIL 2 rated safety system (IEC61508) loop applications, as 1oo1 architecture (HFT:0)
- Universal AC Supply voltage: 95 to 250Vac as standard
- 24Vdc supply option available on request
- RFI Protection to IEC61000-4-3:2006/A2:2010 available ('K' Option)
- Amelec standard 10 year warranty

APPLICATION

- RTD Repeat / Splitter
- Signal Isolator / Noise filter
- Signal converter to resolve incompatibility.

TECHNICAL SPECIFICATION

INPUT

Two or Three wire PT100 RTD. Minimum input span 50 °C.

(PT1000 RTD option available on request)

Note: mA Excitation for the RTD will be from the device connected to output 1.

OUTPUT 1

Non-Isolated repeat connection of input RTD signal.

OUTPUT 2

DC current or voltage specified in the range of:
 Current up to 100mA max in Sink configuration (externally powered)
 Current up to 22mA max Source configuration (Internally powered)
 Voltage any from 1 to 10Vdc max @ up to 5mA per output.
 Typical output ranges: 0 - 10Vdc (Min. load 500Ω)
 4 - 20mA (Max. load 1200Ω)

CONTROLS

Zero / Span (+/- 20%): 15 turn potentiometers for output calibration.

INDICATOR

Power ON: LED, Amber.

PERFORMANCE


Linearity: < ±0.2%
 Response time: Typically < 400mS
 Accuracy: < ±0.2%

PROTECTION


Input open circuit response: Upscale drive
 Isolation: 1000V rms Input+Output1/Output 2/Supply/Earth
 Internal Fuse.
 Input over range: typically up to 300%.

TERMINATION

Input +	1
Input -	2
3 rd Wire	3
OUTPUT 1 +	4
OUTPUT 1 -	5
3 rd Wire -	6
OUTPUT 2 +	7
OUTPUT 2 -	8
Earth	10
Live / +	11
Neutral / -	12

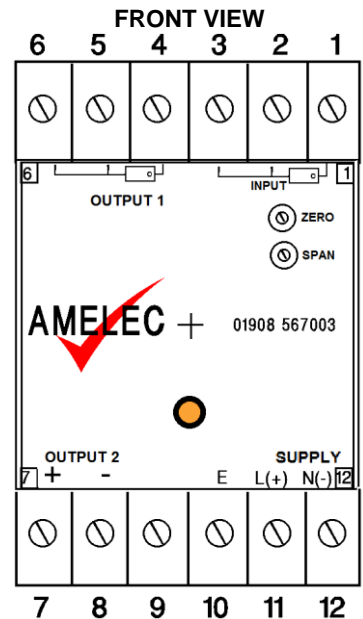

FUNCTION BLOCK DIAGRAM

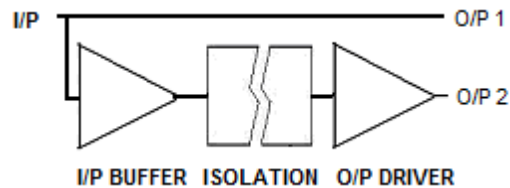

ENVIRONMENTAL CONDITION

Storage temperature: - 40 to +70 °C
 Operating Ambient: -15 to +55 °C
 Relative Humidity: 5 to 95% RH

MOUNTING / DIMENSION

Enclosure: 50w x 75h x 110d (mm)
 Mounting: Din rail / Surface (optional Panel Mount)
 Weight < 200g

ADD ON / OPTIONS

DI: LCD display for local monitoring
 P: Test point - Output 2
 K: Higher level of RFI protection (20-1000MHz, ≤30V/m)
 PT1000: PT1000 RTD input available on request