

ADT111 Thermocouple Trip Amplifier with Single set point

- Suitable for SIL 1, SIL 2 or SIL 3 rated (EN 61508-2) Safety Instrumented System (SIS) loop applications
Supply voltage options: 20Vac ±20%
115Vac ±20%
230Vac ±20%
24Vdc ±10%
48Vdc ±10%
- RFI Protection to EN 61000-4-3:2006/A2:2010 option 'K' available (20-3000MHz ≤10V/m, 20-1000MHz ≤30V/m)
- Fixed or Variable Time Delay into Trip 'T' option available
- Front fascia Digital Display 'DI' option available
- Non-smart / Non-uProcessor based, Type A instrument
- AMELEC Standard 10 year warranty

Technical Specifications

Input

mV signal developed from any Thermocouple type; J,K,N,R,S or T, with a minimum 4mV span as std.
(*Other special input signal ranges available on request – 'X' option)

Outputs

Trip output is a set of changeover contacts (D.P.C.O) rated at 250VAC, 2A, 100VA resistive.
Relays De-energise on Trip & Fail Safe on loss of power as std
Red LED indication of relay status; ON Energised / healthy, Extinguished in Trip / De-energised state.
Latching relay with local/remote Reset facility 'L' option available

Isolation

1000V RMS* Input/Contacts/Supply/Earth
*(500Vdc if RFI option 'K' is specified)

Performance



Trip settability: ±1%
Trip repeatability: ±0.1%
Response time: <100mS (0-100% input step change)
Deadband: 1% Span as std.
(Variable hysteresis 0.5%-20% available – 'V' option)
Input Open Circuit response: Upscale drive as std
(O/C Downscale drive available on request if preferred)

Environmental Conditions

Storage Temperature: -40°C to +70°C
Operating Ambient: -15°C to +55°C
Relative Humidity: 5 – 95% RH (Non-Condensing)
EMC: 2014/30/EU, EN 61326-1:2013 (Controlled EM)
(*K'option to the highest Generic Industrial levels)

Dimensions/Mounting

50w x 75h x 110d mm, Din Rail (TS35) or Surface
(*K' option enclosure = 182d mm)

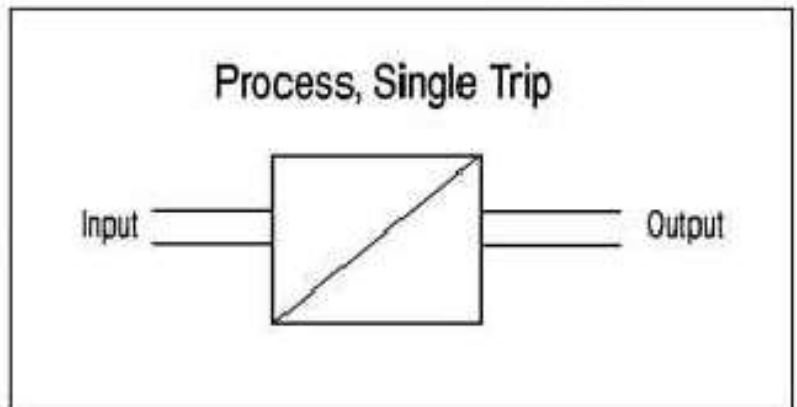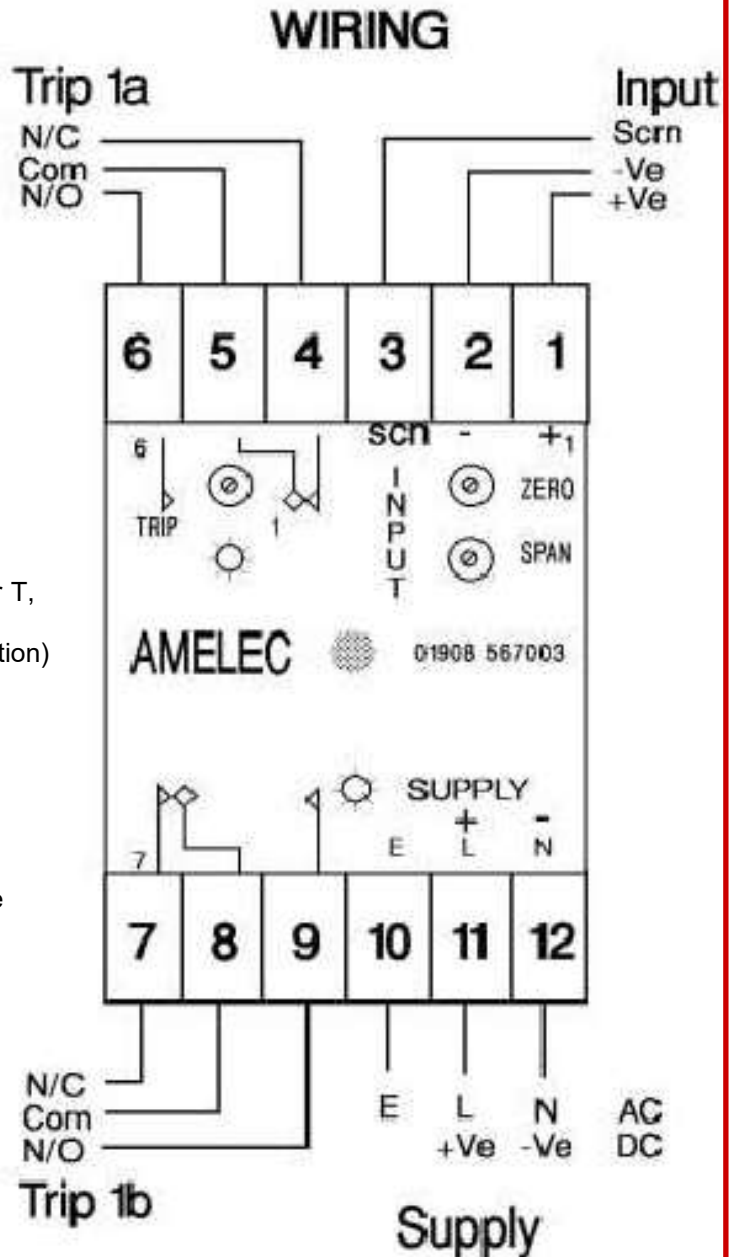

Tel: 01908-567003 Email: sales@amelec-uk.com Visit: www.amelec-uk.com Fax: 01908-566735

AMELEC Instruments, Cochran Close, Crownhill, Milton Keynes, MK8 0AJ