

## ADR131X-5-DC Five Way Interface Relay

- Suitable for SIL 1 & SIL 2 rated (EN 61508) safety instrumented system (SIS) loop applications, as 1oo1 architecture (HFT:0)
- Non-Smart / Non-uProcessor based, Type 'A' component.
- DC Coil (Non-Latching) Rating options:  
24V / 48V / 110V DC
- AMELEC Standard 10 year warranty

### Technical Specifications

#### Input

24V to 110V DC Voltage applied Relay Contact

#### Five way Output

5 x Repeat C.O Contacts, rated 8A 250Vac as standard.  
May be specified as either all N.O or N.C contacts, or as a combination of both N.O & N.C contacts.

Contact material: High performance AgSnO<sub>2</sub>  
Max switching voltage: 400Vac  
Response - Operate / Release time: <50ms  
Mechanical Endurance: DC >30x10<sup>6</sup>, AC >5x10<sup>6</sup> operations

N.B; Relay contacts that switch inductive loads or other arcing devices should be suppressed, ideally at or across the inductance or other source.

#### Indicator

1 x Red LED: **ON** when Relay module Energised  
(Extinguished in De-energised state)

#### Isolation/Protection

5000V rms (Reinforced/Opto-iso) Input/Output(s) contacts  
1000V rms between Open Contacts  
5000V rms between Contacts & Coil

#### Environmental Conditions

Storage Temperature: -40 to +70°C  
Operating Ambient: -20 to +70°C  
Relative Humidity: 5 – 95 RH (Non-condensing)  
EMC: 2014/30/EU , EN 61326-1:2013 (Industrial)  
Vibration Resistance: 5g at 30-300Hz (Functional)



#### Mounting

Din Rail (TS35) or Surface by corner fixing holes as standard

#### Dimensions

50w x 75h x 110d mm

### WIRING

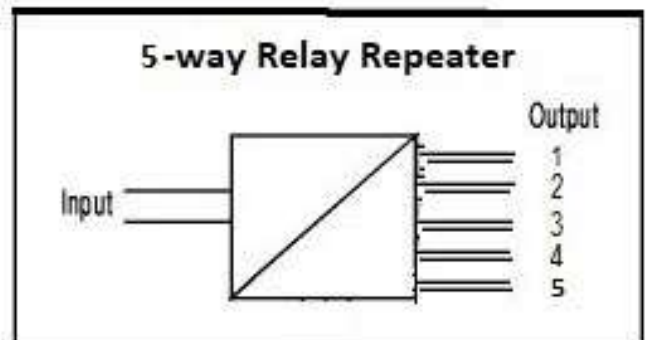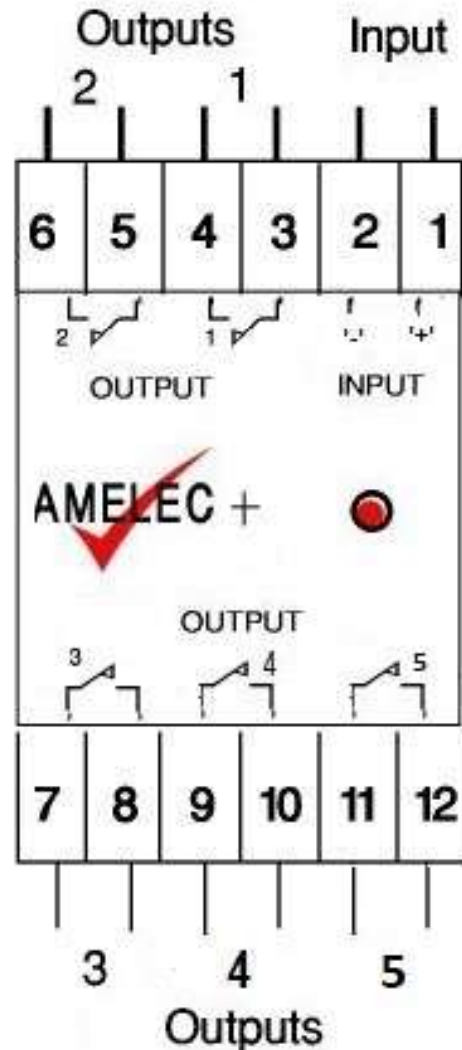

Tel: 01908-567003 Email: [sales@amelec-uk.com](mailto:sales@amelec-uk.com) Visit: [www.amelec-uk.com](http://www.amelec-uk.com) Fax: 01908-566735

**AMELEC Instruments, Cochran Close, Crownhill, Milton Keynes, MK8 0AJ**