

## ADM240 Slidewire/ Resistance/ Thermistor/ Potentiometer Transmitter

- Suitable for SIL 1 & SIL 2 rated (EN 61508-2) safety instrumented system (SIS) loop applications, as 1oo1 architecture (HFT:0)
- Supply voltage options:
 

|        |      |
|--------|------|
| 115Vac | ±20% |
| 240Vac | ±20% |
| 24Vdc  | ±10% |
| 48Vdc  | ±10% |
- Non-Smart / Non-uProcessor based, Type A instrument
- RFI Protection to EN 61000-4-3:2006/A2:2010 available ('K' option)
- AMELEC Standard 10 year warranty

### Technical Specifications

#### Input

Resistance/ Slidewire/ Potentiometer/ NTC/PTC Thermistor, Input ranges up to 60KΩ, 2 or 3 wire input connections.

Any wire wound Potentiometer can be specified in the range of: 100Ω up to 20KΩ.

Version also available for plastic film pots (Input Excitation 1V dc @ 2mA max, other options available).

#### Output

DC current or voltage specified in the range of: Current up to 100mA max in Sink configuration (externally powered)

Current up to 22mA max in Source configuration (Internally powered)

Voltage up to 20Vdc max @ up to 5mA per output.

Typical output: 4-20mA (Active port, 1200Ω load max)

#### Isolation

1000V RMS\* Input/Output/Supply/Earth

\*(500Vdc when RFI option 'K' is specified)

#### Performance

Accuracy/Linearity: < ±0.1% resistance span as std (Reverse Acting option 'RA' & Linearisation of output signal to resistance curves option 'G' is available if required)

Response time: <400mS (10-90% input step change)

Supply consumption: < 3VA

Input O/C response: Upscale drive as standard (O/C Downscale drive 'X' option available)

#### Environmental Conditions


Storage Temperature: -40 to +70°C

Operating Ambient: -15 to +55°C

Relative Humidity: 5 – 95% RH (Non-Condensing)

EMC: 2014/30/EU, EN 61326-1:2013 (Controlled EM)

('K' option; to the highest Generic Industrial levels)

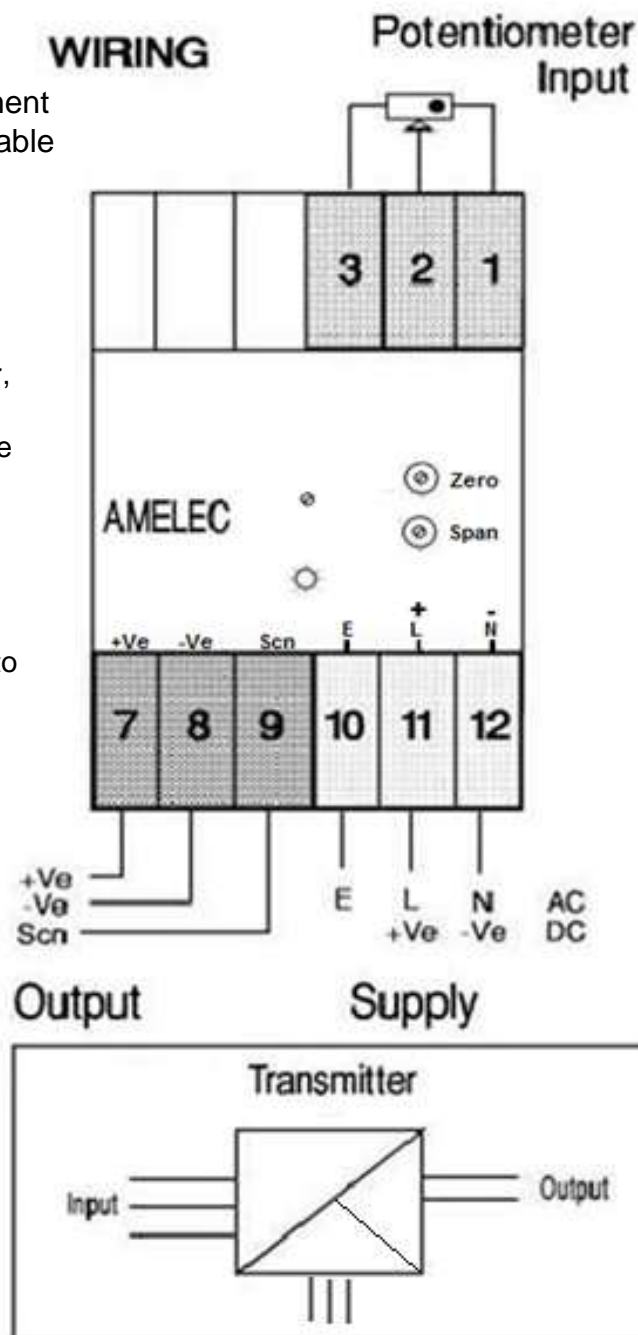

#### Dimensions/Mounting

Enclosure: 50w x 75h x 110d mm

Mounting: Either Din Rail (TS35) **or** Surface by corner fixing holes as standard

Tel: 01908-567003 Email: [sales@amelec-uk.com](mailto:sales@amelec-uk.com) Visit: [www.amelec-uk.com](http://www.amelec-uk.com) Fax: 01908-566735

**AMELEC Instruments, Cochran Close, Crownhill, Milton Keynes, MK8 0AJ**